


Installation Guide


REDtip Roof Hook M101

Compatible with most interlocking tiles


See REDtip selector chart

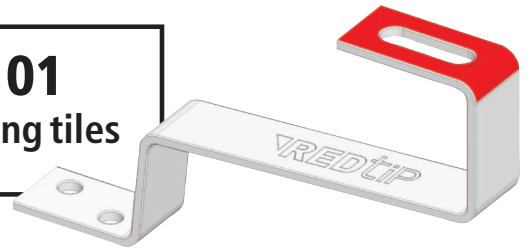

- 1 Remove tile/s and identify a suitable rafter to attach the REDtip roof hook. Ensure the screws are fully tightened to secure the roof hook.

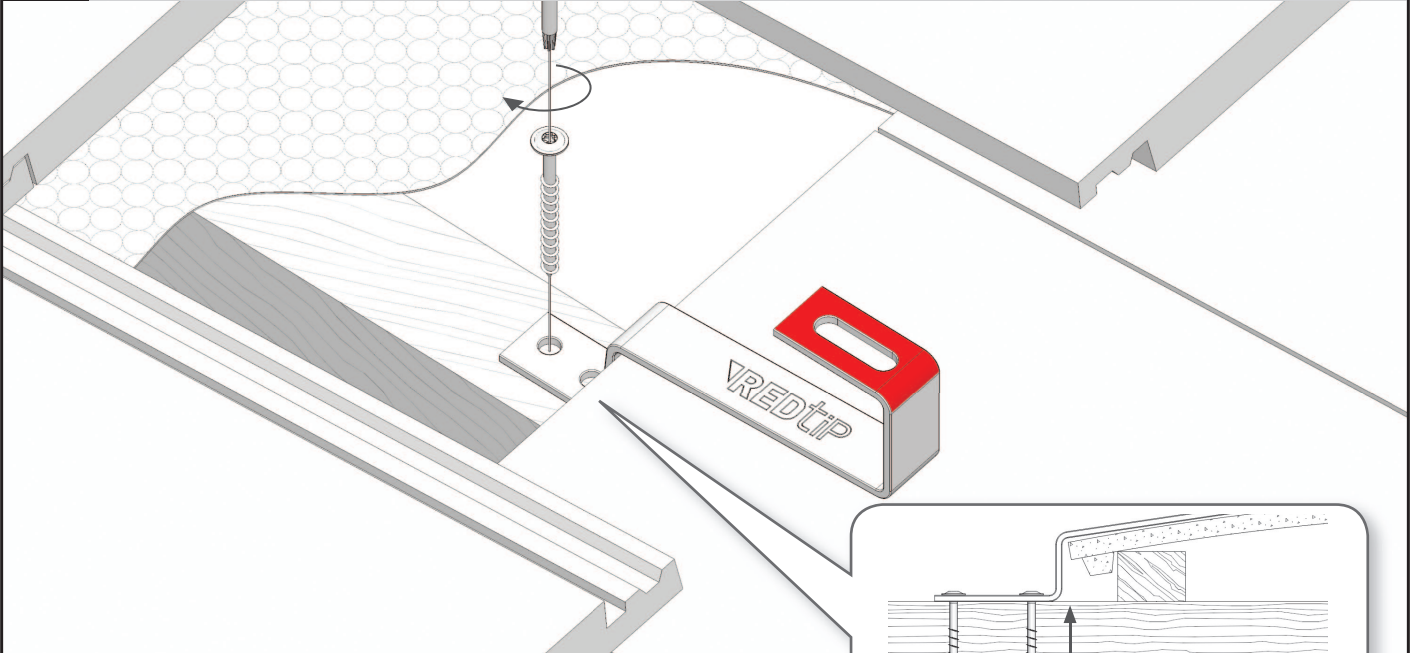

- 2 To ensure a weather tight fit, you may have to grind the lip of tile to the depth of the hook.

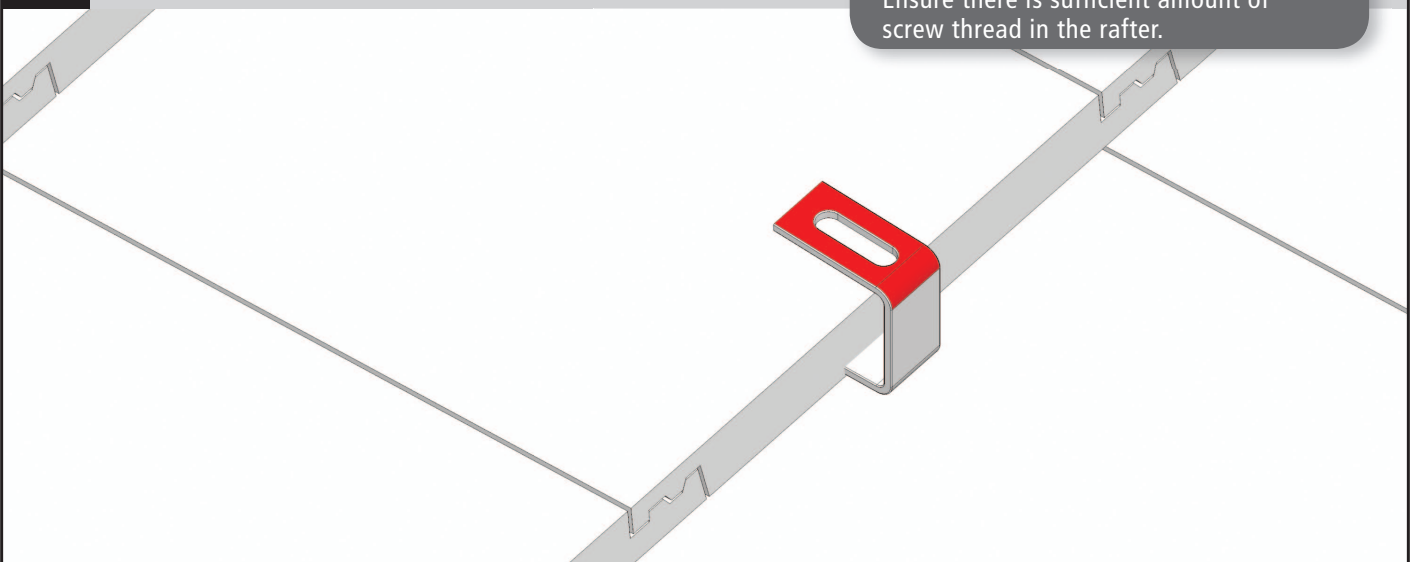

Ensure there is sufficient amount of screw thread in the rafter.

- 3 The distances between the roof hooks will be dependant on structural and wind loadings. Always consult a Structural Engineer if you are in any doubt. Maximum recommended distance between the roof hooks is 1.6m.

